



Installation of the adaptor is very simple, but for non advanced users we recommend to install it in your local bicycle service. Improperly installed or used adaptor may endanger your life or health. The brand - mozartt.com is not liable for damages caused by improper use of the adaptors.

1. Adaptor is installed under the flange of the bottom bracket cup (on the drive side). To assemble the adaptor, you have to screw out the bottom bracket. If you have already done it, put the adaptor on the cup thread (drive side). Make sure that you have mounted the adaptor in correct direction (see pic. below).

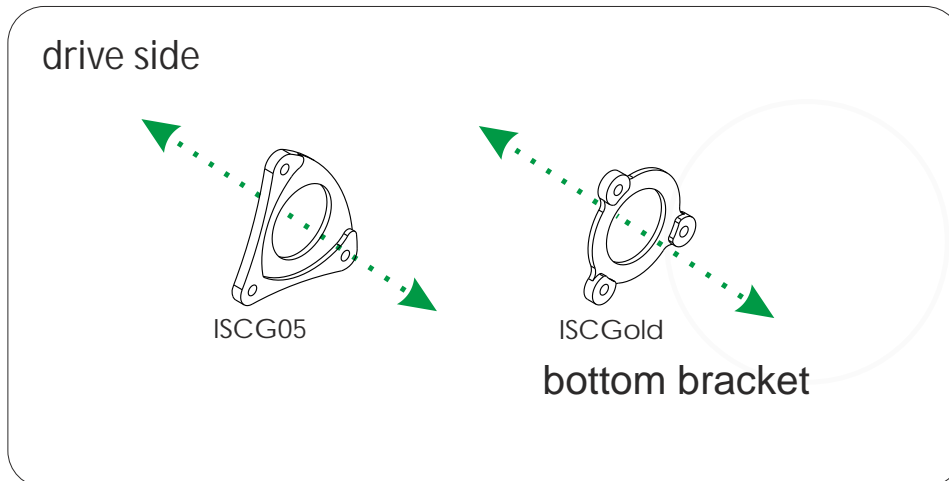

2. If you already have put the adaptor on the bottom bracket thread, try to tighten the bottom bracket cup, using your fingers as long as possible. Do not tighten the cup to the end yet, you have to set the adaptor on correct place.

3. Set the adaptor so that its top hole is located between the 12:30pm and 1pm (as on clock face).

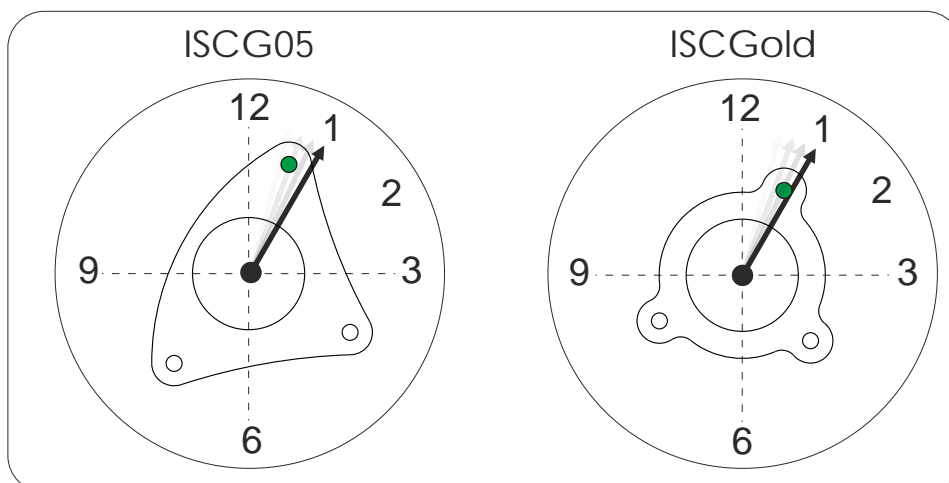

4. Tighten the bottom bracket cups using wrench, while making sure that the adaptor has not changed its position.